


## BESTLITE BL9L // PENDANT, EU MODEL

Designed by Robert Dudley Best

### PRODUCT

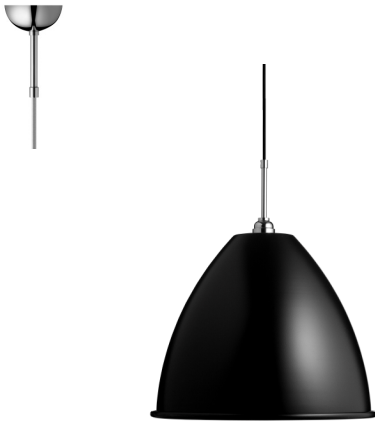

Item no.: 001-0916X  
+ style code

### DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

#### VERSION - BESTLITE PENDANT LAMP BL9L

Shade: Powder coated aluminium  
Ceiling cup: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

#### VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**BL9S, BL9M, BL9L, BL9XL**

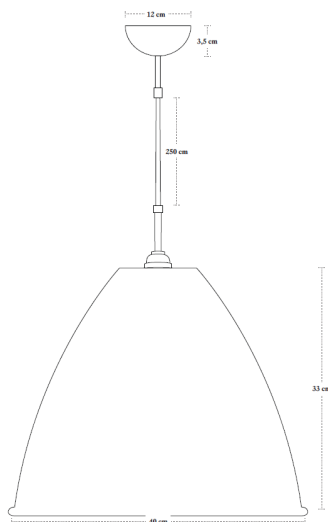

### COLOURS



// Black / Chrome



// Off-White / Chrome



// White / Chrome

### FACTS

#### MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm  
Lamp rosette diameter: Ø120 mm  
Shade height: 330 mm  
Shade diameter: Ø400 mm  
Cord - total length w/sw: App. 2500 mm  
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE  
1241 g

OUTER PACKAGING - TYPE  
White hard cardboard box w/ Sply corrugated

PACKAGING MEASUREMENT - L X W X H CM  
L:43 x W:43 x H:39 cm

#### WEIGHT PACKAGING - MATERIAL TYPE

- LD polyethylene: 78 g
- LD polyethylene bottom: 56,5 g
- PE polybag boble: 68,5 g
- PE polybag: 30 g
- Cardboard inside: 89,5 g
- Cardboard outside: 774 g

WEIGHT PACKAGING - TOTAL  
2275 g

NUMBER OF PARCELS  
1 pcs.

#### LIGHT SOURCE:

- Socket: E27 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 15 W = (75 WATT incandescent bulbs)
- Max wattage: 18 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 52 W = (75 WATT incandescent bulbs)
- Max wattage: 52 W

- All lamps can be fitted with a dimmer.  
Please contact your local electrician.

- Lightbulb not included

**BESTLITE BL9L // PENDANT, EU MODEL**  
 Designed by Robert Dudley Best

**CLEANING AND MAINTENANCE**

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

**ACCESSORIES**

-

**ENVIRONMENT**

-

**TESTS**

-

**CERTIFICATION AND LABELS**

**CE-CERTIFIED**

**STANDARD**

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base


**KOMPONENTS**

- 03 // Shade Ø40 cm.
- 07 // E27 lamp holder
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 57 // Interior screen ring


Item no.: 001--0916X

**MATERIAL**

- Shade: Powder coated aluminium
- Ceiling cup: Chromed steel
- Textile covered cord

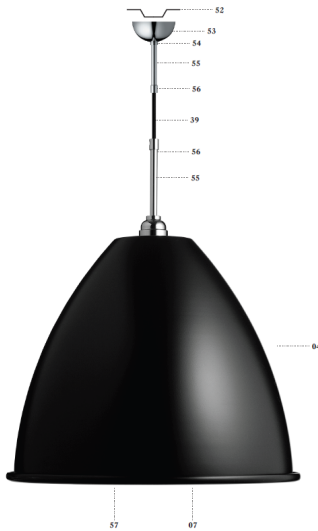

**INSTALLATION INSTRUCTIONS**

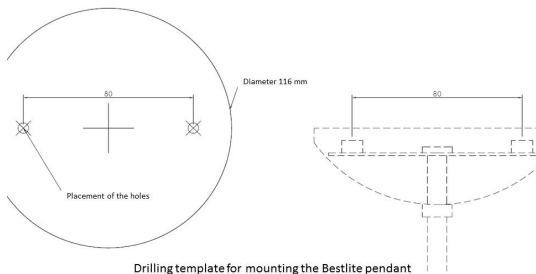


## BESTLITE BL9M // PENDANT, EU MODEL

Designed by Robert Dudley Best

### PRODUCT



### COLOURS

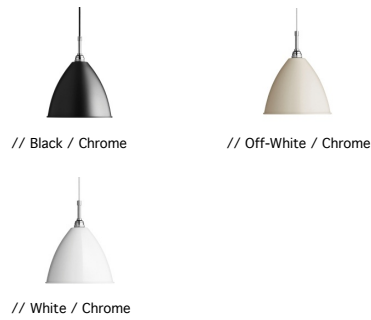

Item no.: 001-0913X  
+ style code

### DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

### VERSION - BESTLITE PENDANT LAMP BL9M

Shade: Black, White or Off-White - Powder coated aluminium  
Ceiling cup: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

### VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**BL9S, BL9M, BL9L, BL9XL**

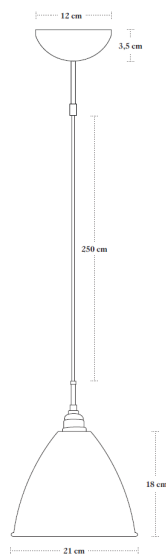

### FACTS

#### MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm  
Lamp rosette diameter: Ø120 mm  
Shade height: 180 mm  
Shade diameter: Ø210 mm  
Cord - total length w/sw: App. 2500 mm  
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE  
535 g

#### PACKAGING TYPE

White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM  
L:26 x W:40 x H:34 cm

#### WEIGHT PACKAGING - MATERIAL TYPE

- Bestlite brochure 120 x 170 mm: 66,5 g
- Paper Egg crate: 456,5 g
- Umbraco key: 5 g
- PE polybag: 1 g
- PE polybag: 60 g
- Cardboard inside: 38 g
- Cardboard outside: 532 g

WEIGHT PACKAGING - TOTAL  
1629 g

#### NUMBER OF PARCELS

1 pcs.

#### LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.  
Please contact your local electrician.

- Lightbulb not included

## BESTLITE BL9M // PENDANT, EU MODEL

Designed by Robert Dudley Best

### CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

### ACCESSORIES

-

### ENVIRONMENT

-

### TESTS

-

### CERTIFICATION AND LABELS

#### CE-CERTIFIED

#### STANDARD

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark




Luminaires accepted for mounting on a flammable base

#### KOMPONENTS


- 02 // Shade Ø21 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube

Item no.: 001-0913X

Shade: Black, White or Off-White - Powder coated aluminium  
 Ceiling cup: Chromed steel  
 Textile covered cord

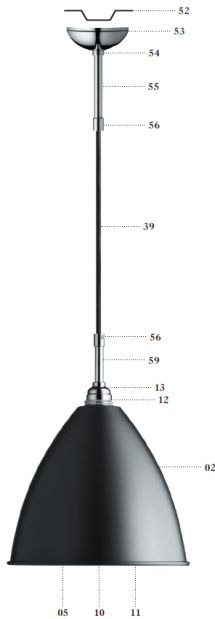

### INSTALLATION INSTRUCTIONS

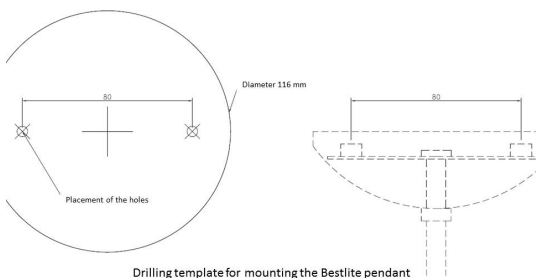

## BESTLITE BL9S // PENDANT, EU MODEL

Designed by Robert Dudley Best

### PRODUCT



### COLOURS



// Black / Chrome



// Off-White / Chrome



// White / Chrome

Item no.: 001-0910X  
+ style code

### DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

### VERSION - BESTLITE PENDANT LAMP BL9S

Shade: Black, White or Off-White - Powder coated aluminium  
Ceiling cup: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

### VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**BL9S, BL9M, BL9L, BL9XL**



### FACTS

#### MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm  
Lamp rosette diameter: Ø120 mm  
Shade height: 140 mm  
Shade diameter: Ø160 mm  
Cord - total length w/sw: App. 2500 mm  
Cord - exposed out of lamp: App. 1980 mm

#### WEIGHT ITEM - LAMP INCL. WIRE

395 g

#### PACKAGING TYPE

White cardboard box w/ 5ply corrugated

#### PACKAGING MEASUREMENT - L X W X H CM

L:26 x W:28 x H:20,5 cm

#### WEIGHT PACKAGING - MATERIAL TYPE

- Paper Egg crate: 306,5 g
- PE polybag: 60 g
- Umbraco key: 0,5 g
- PE polybag: 1 g
- Cardboard inside: 26,5 g
- Cardboard outside: 207 g

#### WEIGHT PACKAGING - TOTAL

997 g

#### NUMBER OF PARCELS

1 pcs.

#### LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W ~ (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W ~ (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.  
Please contact your local electrician.

- Lightbulb not included

**BESTLITE BL9S // PENDANT, EU MODEL**  
 Designed by Robert Dudley Best

**CLEANING AND MAINTENANCE**

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

**ACCESSORIES**

-

**ENVIRONMENT**

-

**TESTS**

-

**CERTIFICATION AND LABELS**

CE-CERTIFIED

STANDARD

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20




Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

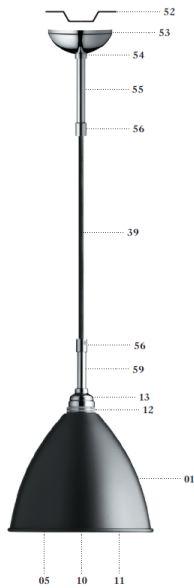

KOMPONENTS


- 01 // Shade Ø16 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube

Item no.: 001-0910X

MATERIAL

- Shade: Powder coated aluminium
- Ceiling cup: Chromed steel
- Textile covered cord

**INSTALLATION INSTRUCTIONS**

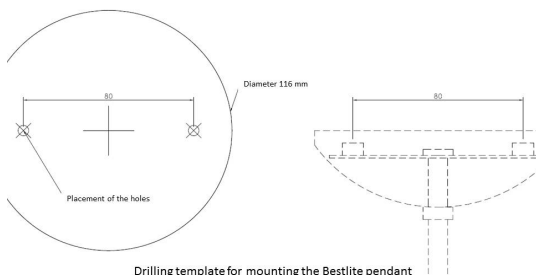


Drilling template for mounting the Bestlite pendant

## BESTLITE BL9XL // PENDANT, EU MODEL

Designed by Robert Dudley Best

### PRODUCT

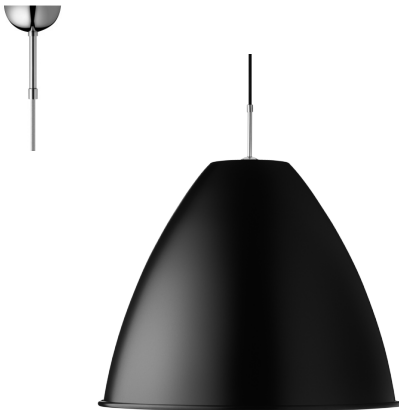

### COLOURS



Item no.: 001-0919X  
+ style code

### DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

### VERSION - BESTLITE PENDANT LAMP BL9XL

Shade: Powder coated aluminium  
Ceiling cup: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

### VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**BL9S, BL9M, BL9L, BL9XL**

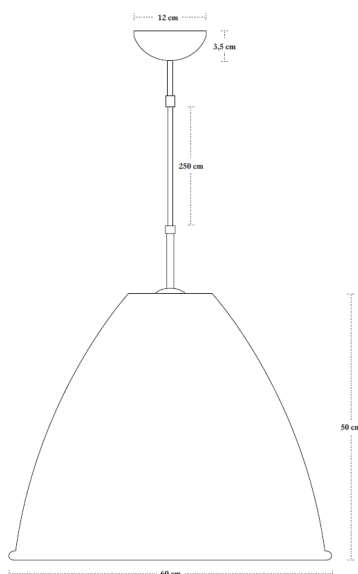

### FACTS

#### MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm  
Lamp rosette diameter: Ø120 mm  
Shade height: 500 mm  
Shade diameter: Ø600 mm  
Cord - total length w/sw: App. 2500 mm  
Cord - exposed out of lamp: App. 1980 mm

#### WEIGHT ITEM - LAMP INCL. WIRE

2500 g

#### PACKAGING TYPE

White hard cardboard box w/ Sply corrugated

#### PACKAGING MEASUREMENT - L X W X H CM

L:640 x W:645 x H:560 cm

#### WEIGHT PACKAGING - MATERIAL TYPE

- LD polyethylene top: 319 g
- LD polyethylene bund: 123,5 g
- PE polybag boble: 114,5 g
- PE polybag: 8 g
- Cardboard inside: 94,5 g
- Cardboard outside: 1897 g

#### WEIGHT PACKAGING - TOTAL

5200 g

#### NUMBER OF PARCELS

1 pcs.

#### LIGHT SOURCE:

- Socket: E27 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 30 W = (150 WATT incandescent bulbs)
- Max wattage: 30 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 105 W = (150 WATT incandescent bulbs)
- Max wattage: 105 W

- All lamps can be fitted with a dimmer.  
Please contact your local electrician.

- Lightbulb not included

**BESTLITE BL9XL // PENDANT, EU MODEL**  
 Designed by Robert Dudley Best

**CLEANING AND MAINTENANCE**

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

**ACCESSORIES**

-

**ENVIRONMENT**

-

**TESTS**

-

**CERTIFICATION AND LABELS**

**CE-CERTIFIED**

**STANDARD**

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base


**KOMPONENTS**

- 04 // Shade Ø60 cm.
- 07 // E27 lamp holder
- 39 // Textile covered cord, round
- 52 // Mounting plate BL9
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 57 // Internal shade ring


Item no.: 001-0919X

**MATERIAL**

- Shade: Powder coated aluminium
- Ceiling cup: Chromed steel
- Textile covered cord

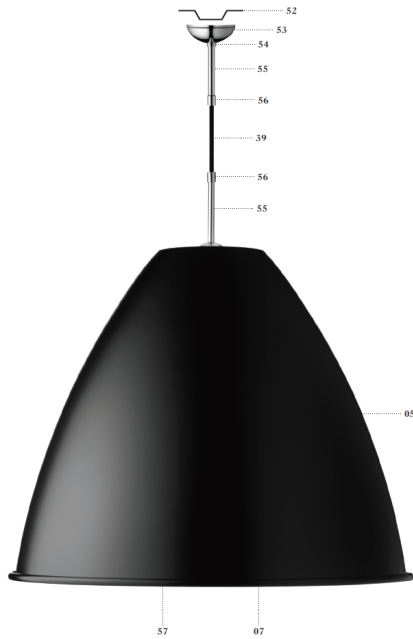

**INSTALLATION INSTRUCTIONS**

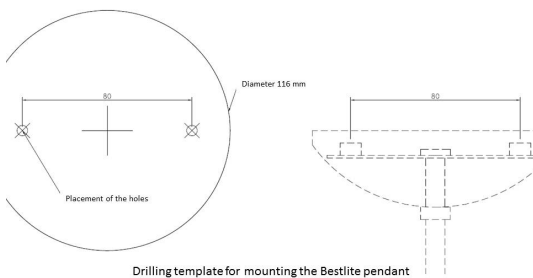



Designed by Robert Dudley Best


## PRODUCT



Item no.: 001-0913X  
+ style code

**Don't polish the brass**

## COLOURS



## DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

### VERSION - BESTLITE PENDANT LAMP BL9M

Shade: Charcoalblack, Matt-White or Grey  
Ceiling cup: Brass with lacquered surface

Shade: Brass with lacquered surface  
Ceiling cup: Brass with lacquered surface

RAL codes are indicative.

- Fabric wire - Black:
- Charcoal black/Brass / White inside // RAL 9011 / RAL 9003 // Gloss level 20 / Gloss level 20
- Grey w/Brass / White inside // RAL 2604005 / RAL 9003 // Gloss level 30 / Gloss level 20
- Brass w/Brass / White inside // - / RAL 9003 // - / Gloss level 20

- Fabric wire - Off-White:
- Matt-White w/Brass / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

## VERSION

Order item - look for part number in the pricelist.

Series contains the following:

**BL9S, BL9M, BL9L, BL9XL**

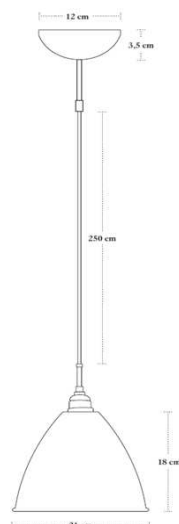

## FACTS

### MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm  
Lamp rosette diameter: Ø120 mm  
Shade height: 180 mm  
Shade diameter: Ø210 mm  
Cord - total length w/sw: App. 2500 mm  
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE  
535 g

PACKAGING TYPE  
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM  
L:26 x W:40 x H:34 cm

### WEIGHT PACKAGING - MATERIAL TYPE

- Bestlite brochure 120 x 170 mm: 66,5 g
- Paper Egg crate: 456,5 g
- Umbraco key: 5 g
- PE polybag: 1 g
- PE polybag: 60 g
- Cardboard inside: 38 g
- Cardboard outside: 532 g

WEIGHT PACKAGING - TOTAL  
1629 g

NUMBER OF PARCELS  
1 pcs.

### LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.  
Please contact your local electrician.

- Lightbulb not included

Designed by Robert Dudley Best

**CLEANING AND MAINTENANCE**

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

**ACCESSORIES**

-

**ENVIRONMENT**

-

**TESTS**

-

**CERTIFICATION AND LABELS**

CE-CERTIFIED

STANDARD

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

KOMPONENTS

- 02 // Shade Ø21 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube

Item no.: 001-0913X


MATERIAL

Shade: Charcoalblack, White or Grey  
 Ceiling cup: Brass with lacquered surface  
 Textile covered cord

Shade: Brass with lacquered surface  
 Ceiling cup: Brass with lacquered surface  
 Textile covered cord



**INSTALLATION INSTRUCTIONS**

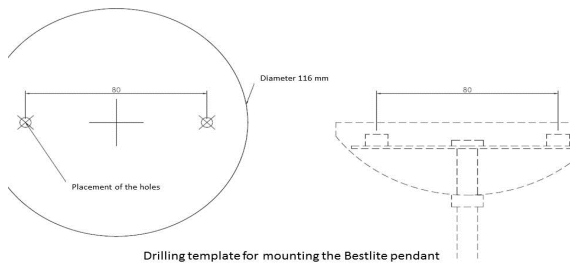

Designed by Robert Dudley Best

## PRODUCT



Item no.: 001-0913X  
+ style code

**Don't polish the brass**

## DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

### VERSION - BESTLITE PENDANT LAMP BL9S

Shade: Charcoalblack, Matt-White or Grey  
Ceiling cup: Brass with lacquered surface

Shade: Brass with lacquered surface  
Ceiling cup: Brass with lacquered surface

RAL codes are indicative.

- Fabric wire - Black:
- Charcoal black/Brass / White inside // RAL 9011 / RAL 9003 // Gloss level 20 / Gloss level 20
- Grey w/Brass / White inside // RAL 2604005 / RAL 9003 // Gloss level 30 / Gloss level 20
- Brass w/Brass / White inside // - / RAL 9003 // - / Gloss level 20

- Fabric wire - Off-White:
- Matt-White w/Brass / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

## VERSION


Order item - look for part number in the pricelist.

Series contains the following:

**BL9S, BL9M, BL9L, BL9XL**



## COLOURS



// Charcoal black / Brass

// Grey / Brass

// Matt-White / Brass

// All Brass

## FACTS

### MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm  
Lamp rosette diameter: Ø120 mm  
Shade height: 140 mm  
Shade diameter: Ø160 mm  
Cord - total length w/sw: App. 2500 mm  
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE  
395 g

PACKAGING TYPE  
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM  
L:26 x W:28 x H:20,5 cm

### WEIGHT PACKAGING - MATERIAL TYPE

- Paper Egg crate: 306,5 g
- PE polybag: 60 g
- Umbraco key: 0,5 g
- PE polybag: 1 g
- Cardboard inside: 26,5 g
- Cardboard outside: 207 g

WEIGHT PACKAGING - TOTAL  
997 g

NUMBER OF PARCELS  
1 pcs.

### LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.  
Please contact your local electrician.

- Lightbulb not included

Designed by Robert Dudley Best

**CLEANING AND MAINTENANCE**

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

**ACCESSORIES**

-

**ENVIRONMENT**

-

**TESTS**

-

**CERTIFICATION AND LABELS**

CE-CERTIFIED

**STANDARD**

- Euro voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

**KOMPONENTS**


- 01 // Shade Ø16 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover, round
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube

Item no.: 001-0913X

**MATERIAL**

Shade: Charcoalblack, White or Grey  
 Ceiling cup: Brass with lacquered surface  
 Textile covered cord

Shade: Brass with lacquered surface  
 Ceiling cup: Brass with lacquered surface  
 Textile covered cord

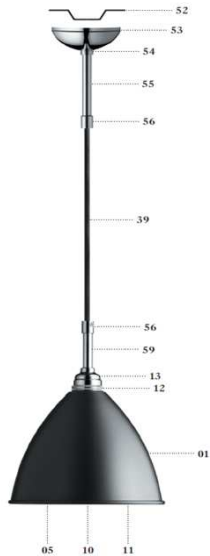

**INSTALLATION INSTRUCTIONS**

